


MULTIMEDIA MIXER AMPLIFIER

MP30D

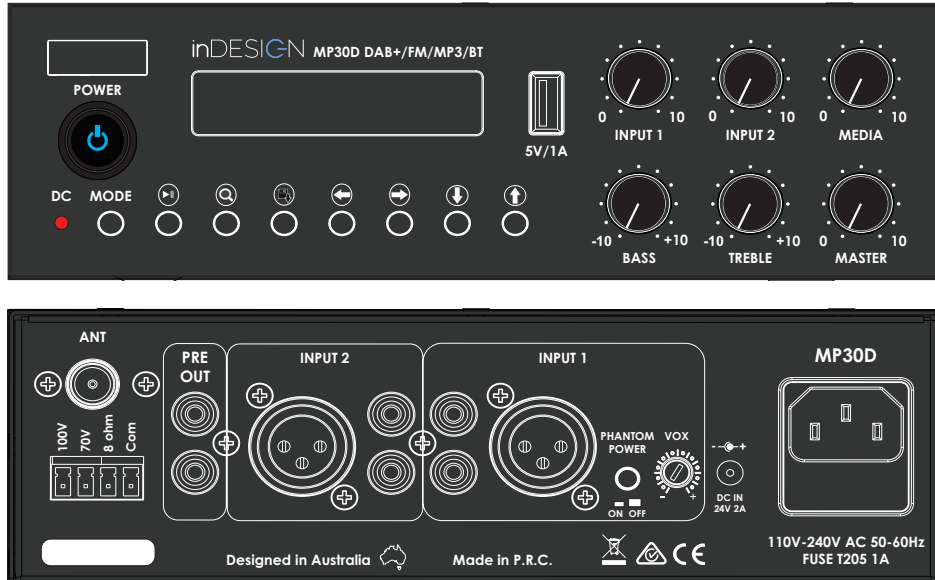

Output power	30 watts. 8Ω or constant voltage 100V/70V line
AC power supply	Internal universal power supply (110VAC – 240VAC)
Output low impedance	8 ohms
Hi impedance output	70V / 161 ohms, 100V / 333 ohms
Input sensitivity	Microphone 5mV, Line 500mV
Frequency response	90Hz – 16KHz, +/- 1dB
THD (at -3dB rate power)	-0.5% @ 1KHz
Tone control	Bass 100Hz ± 10dB, Treble 10kHz ± 10dB
Protection	Thermal protected at 75°, short circuit overload
Size (mm)	220 x 66 x 200
Weight kg (Net)	2.8
FM radio	88 – 108MHz. 10 preset stations
DAB+ frequency range	168MHz – 240MHz
Bluetooth	V3.0, V4.0 supported
USB playback	MP3 & WMA supported
Line Output level	600mV
Mains power	Internal universal power supply (110VAC – 240VAC)
Power consumption	60 watts
Safety	RCM / CE / EMC
Channel separation	>50dB
Noise level	<75dB
DC power supply	21-25V
AC fuse	T1AH 250V 5 x 20 mm

MP30D 30 watt, 100V line mixer amp with built in FM tuner and DAB radio, MP3 player and Bluetooth receiver. Also operates on 24VDC as well as 240VAC.