



PVR™ 2 MEASUREMENT MICROPHONE

Thank you for choosing the Peavey PVR 2. The PVR 2 is an omni-directional microphone for free-field measurement. With a highly reliable circuit and a 1/4" pre-polarized condenser capsule, it boasts high stability, low distortion and low noise in performance. Its excellent flat frequency response makes it an ideal candidate for sonic analysis systems and for special recording as well.


- Rugged metal construction
- Reference-style flat frequency response
- Ideal for room analysis and special recording applications
- Includes hardshell carrying case

SPECIFICATIONS:

Type:	Condenser
Pickup Pattern:	Omni-directional (0 type)
Frequency Response:	20~20000 Hz
Sensitivity:	-37 dBv/pa (14 mv/pa)
Output Impedance:	200 Ohm
Max SPL:	132 dB
Signal-to-Noise Ration:	Over 70 dB
Power Supply:	9~52 V Phantom
Connector:	XLR 3 pins silver plated
Dimensions:	21 (max.) x 193 mm
Net Weight:	150 g (5.3 oz.)



Frequency Response

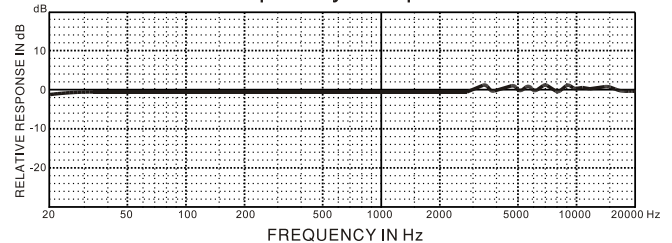

Polar Pattern

